

HS-CC757

1/3-Inch Color IR CCD Camera



Feature

- For Use With 1/3" Format Camera, Mini Size
- With 0.5 Lux Color / 0 Lux With IR / F1.8
- With 380 Tv Lines Horizontal Resolution
- Auto Electronic Shutter Up To 1/60(1/50) ~1/100,000 Second
- Ir Leds Effective Over 15 Meters Distance
- Using High Reflectivity Setups, Increases Infrared Red Intensity And Prolongs The Life Of The Led




Camera


Specification

Model	HS-CC757
General	
Pick up device	1/3" interline transfer CCD
Total Pixels	NTSC:537(H) x 505(V) / PAL:537(H) x 597(V)
Effective Pixels	NTSC:510(H) x 492(V) / PAL:500(H) x 582(V)
Resolution	With 380 TV lines
Sync. System	Internal Sync.
Scanning System	NTSC: 525 Lines / 60 Fields; PAL: 625 Lines / 50 Fields
S/N Ratio	More than 50 dB
Electronic Shutter	Auto/manual 1/60 (1/50) ~1/100,000 sec.
Gamma Correct	0.45 / 1 (set to 0.45 before shipment)
Min. Illumination	0.5 lux color / 0 lux with IR / F1.8
Video Output	Composite 1.0 Vp-p / 75 ohm
Frequency	
Horizontal	NTSC: 15.734 KHz ; PAL: 15.625 KHz
Vertical	NTSC: 60 Hz ; PAL: 50 Hz
Backlight Compensation	on/off switchable
Lens Mount Type	
Lens Type	4.3mm, 6mm, 8mm, 12mm
Electrical	
DC power Source	DC12V
Power Consumption	3.4W (Max)
Current	280mA (Max)
Weight	N.W./G. W.:0.505kg / 0.56kg
Dimension	57(Diameter) x 82.6(H)mm
Operation Temperature	-10 to 50 °C (14 to 122 °F)
Storage Temperature	-20 to 70 °C (-4 to 158 °F)

Dimension

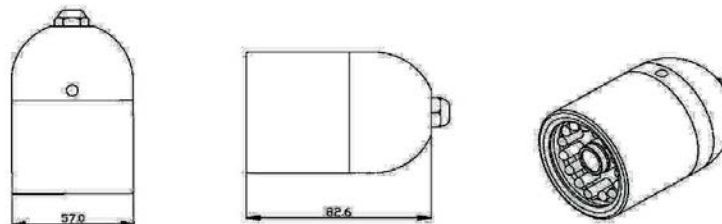

For Single Point Solution from Designing to After Sales & Service. Please contact



COMPTRONIC SOLUTIONS

14/2, Old China Bazar Street, 3rd Floor, Suite No. 202, Kolkata - 700 001, INDIA

Phone : 91-33-2242-4094 / 2231-8007 • Telefax : 91-33-2242-0492

E-mail : info@comptronicsolutions.com • Website : www.comptronicsolutions.com

Our Partner