

HS-CD1000

1/4-Inch Color Mini Dome CCD Camera

Feature

- For Use With 1/4" Format Camera
- Min. Illumination 1 Lux at F2.5
- With 380 TV Lines Horizontal Resolution
- Auto Gain Control
- Automatic white balance




Camera


Specification

Model	HS-CD1000
General	
Pick up device	1/4" interline transfer CCD
Total Pixels	NTSC:537(H) x 505(V) / PAL:537(H) x 597(V)
Effective Pixels	NTSC:510(H) x 492(V) / PAL:500(H) x 582(V)
Resolution	With 380 TV lines
Sync. System	Internal Sync.
Shutter Control	NTSC: 1/60-1/100,000s / PAL: 1/50-1/100,000s
S/N Ratio	More than 48 dB
White Balance	ATW (Auto Tracing White Balance)
Gamma Correct	0.45
Min. Illumination	1 lux / F2.5
Video Output	Composite 1.0 Vp-p / 75 ohm
Frequency	
Horizontal	NTSC: 15.734 KHz ; PAL: 15.625 KHz
Vertical	NTSC: 60 Hz ; PAL: 50 Hz
Automatic Gain Control	ON
View Angle	H:85° V:64°
Lens Mount Type	BOARD LENS 2.5mm (1/3" f:2.5 F:2.5)
Electrical	
DC power Source	DC 12V
Power Consumption	1W
Current	85mA (Max) / DC 12V
Weight	N.W./G.W.: 0.070kg / 0.110kg
Dimension	60(Diameter) x 46(H)mm
Operation Temperature	-10 to 50 °C (14 to 122 °F)
Storage Temperature	-20 to 70 °C (-4 to 158 °F)

Dimension

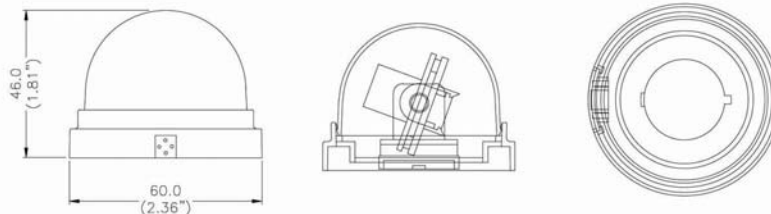

For Single Point Solution from Designing to After Sales & Service. Please contact



COMPTRONICS SOLUTIONS

14/2, Old China Bazar Street, 3rd Floor, Suite No. 202, Kolkata - 700 001, INDIA

Phone : 91-33-2242-4094 / 2231-8007 • Telefax : 91-33-2242-0492

E-mail : info@comptronicsolutions.com • Website : www.comptronicsolutions.com

Our Partner